




SPR-100 Ultra 120W SLIM 12V Black-Frame

Art-No: 3-01-011025



Maximum Performance

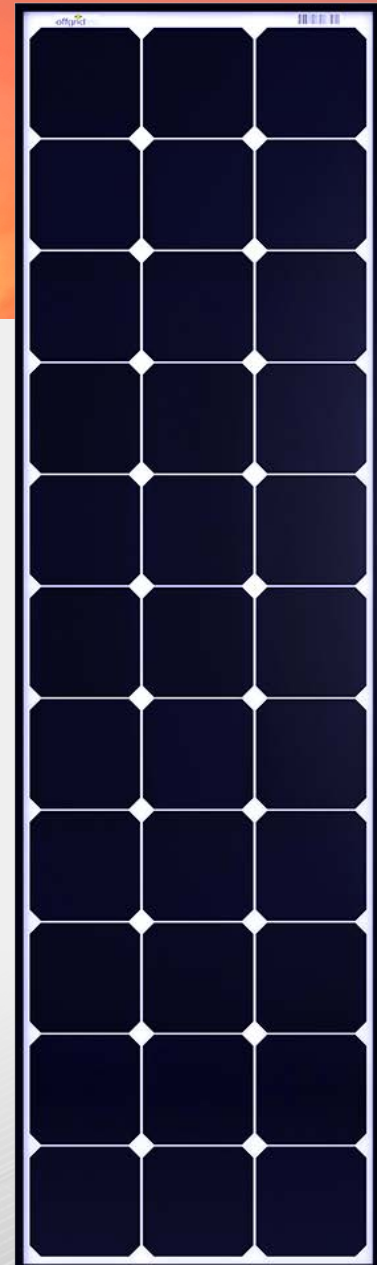

Features:

- Above-average solar yield on the smallest Area:
120W with smallest dimensions
- The SLIM version is an extra slim special version of the SPR-100 Ultra
- 1000-times proven technology and quality
- Patented Back-Contact-Cell technology
- Pioneering module efficiency and solid light properties
- Universally applicable in private and commercial projects

Technical Data

Item number:	3-01-011025
EAN:	4250983241242
Manufacturer part no.:	011025
System voltage:	12V / DC
Module voltage (Vmp):	20,5 V
Generator power (Wp):	120W
max. current (Imp):	5,87A
open circuit voltage(Voc):	24,08V
Short circuit current(Isc):	6,22A
max. string voltage:	600V DC
Cell type:	monocrystalline SPR Cells
Ambient temperature:	-40°C - +85°C
Temperature Coefficient V:	-0,236%/°C
Temperature Coefficient -A:	+0,058%/°C
Temperature Coefficient -W:	-0,27%/°C
Dimensions (LxBxH):	1435 x 415 x 35mm
Weight:	6,8 kg



About us

Offgridtec GmbH
Im Gewerbepark 11
84307 Eggenfelden

Contact

Tel +49 8721 91994-00
Mail info@offgridtec.com

Onlineshop

www.offgridtec.com



Download on the
App Store



GET IT ON
Google Play





SPR-100 Ultra 110W 12V Black-Frame

Art-No: 3-01-011025

Specifications

Cell size:	125 x 125mm
Cell arrangement:	4 x 8
Cell manufacturer:	Sunpower Corp.
Protection class of the junction box:	IP67, waterproof
Bypass diodes:	2 pcs
Solar plug type:	MC4
Length of the connection cables:	100cm
Mounting type:	ABS spoiler or rail system

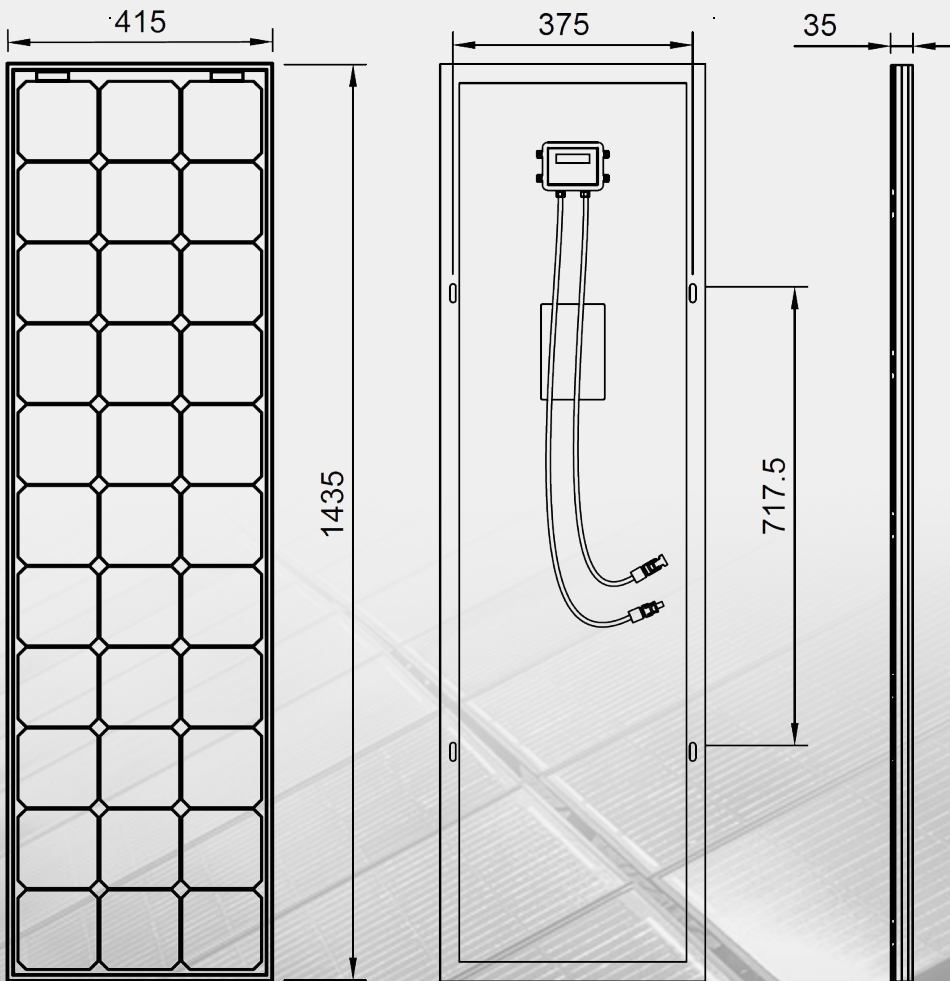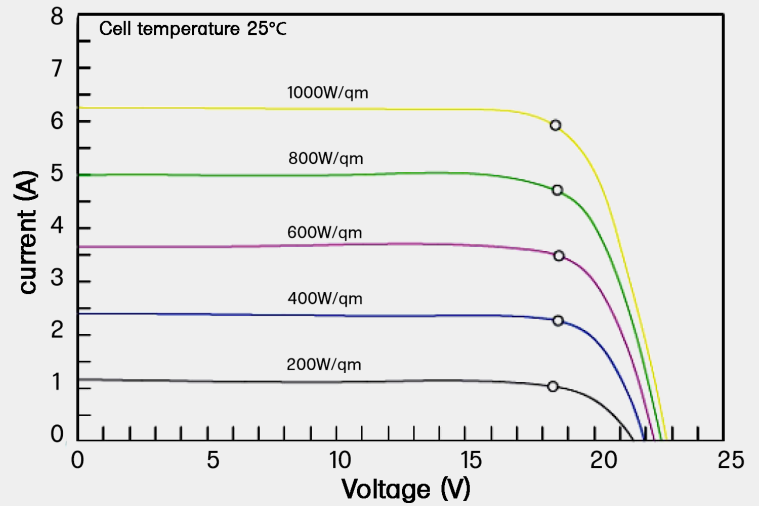

Guarantees

Our SPR solar modules come with a 5-year product guarantee and a linear performance guarantee of 10 years on 80 percent of the rated output.

About us

Offgridtec GmbH
Im Gewerbepark 11
84307 Eggenfelden

Contact

Tel +49 8721 91994-00
Mail info@offgridtec.com

Onlineshop

www.offgridtec.com

